




**Concentric Positioning and Clamping Elements**  
with variable range of clamping, hydraulically operated  
double acting, max. operating pressure 500 bar

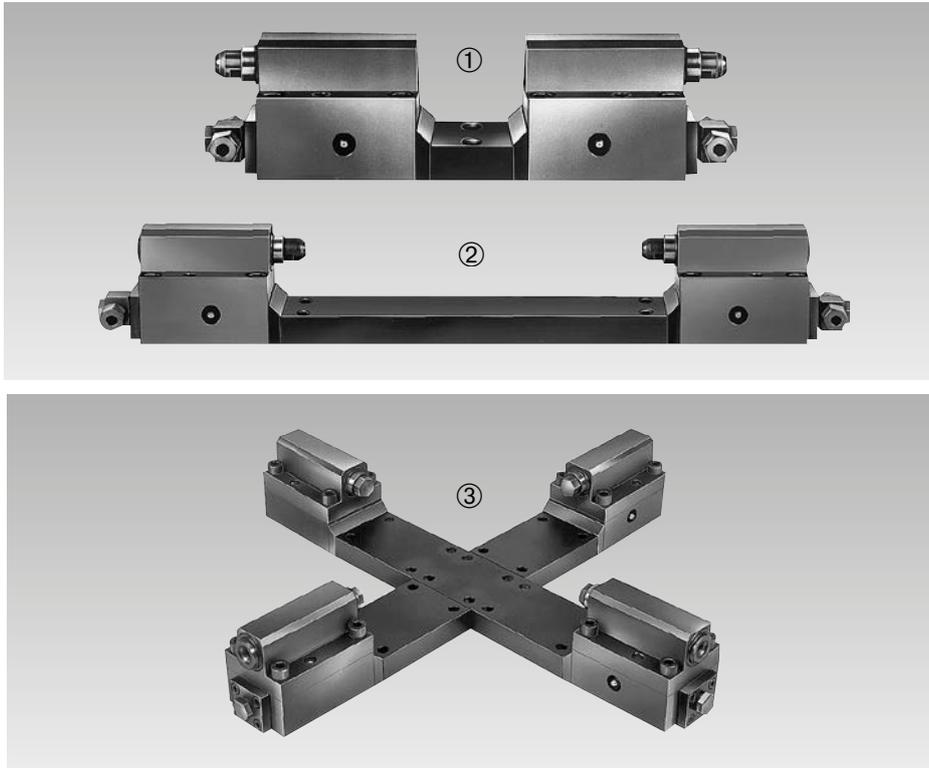

**Figures**

- ① Double clamping element for concentric interior clamping
- ② Double clamping element with prolonged connecting bar for exterior clamping
- ③ By means of the double clamping elements modular fixtures can be composed which position and clamp concentrically in several dimensions, e.g. in direction of the x- and y-axis.


**Description**

Concentric positioning and clamping with two or three-jaw chucks on stationary fixtures is nothing new. In many applications, however, it is not possible to place the relatively large chuck bodies on the fixture. Often the smaller clamping strokes are an additional obstacle.



In our development, the individual parts can be connected to a two or multiple-element version. In the multiple-jaw version, each pair of jaws clamps independently of the remaining ones, thereby concentric clamping is obtained.

The opening can be determined by means of a connecting bar. The clamping strokes of the several sizes are designed such that manual or automatic loading and unloading can be effected to clamp blanks with large tolerances. Also single-acting elements are available on request.

**Active principle**

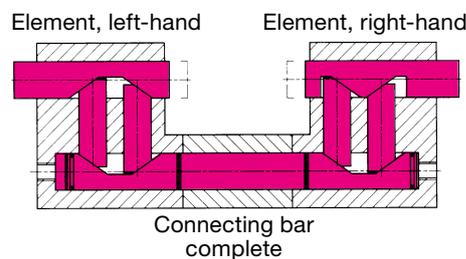

**Clamping possibilities**

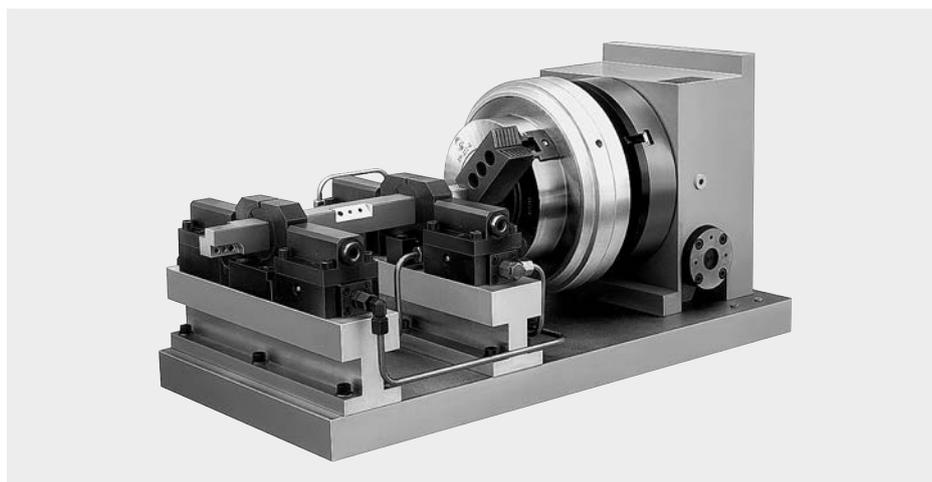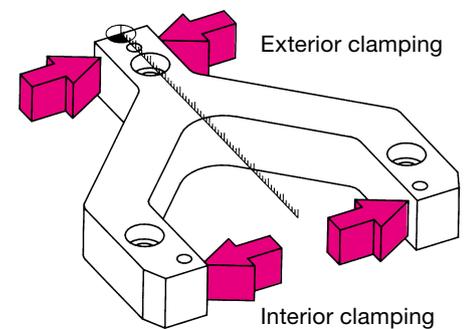

**Application example**

The flexible clamping unit is used to clamp bars which can be machined in every position, e.g. drilled, milled, threaded, etc.

In conjunction with a pneumatic two-jaw chuck the rotary indexing table is used to determine the machining position of the workpiece.


The two-jaw chuck and the right-hand concentric clamping element keep the bars in the exact working position.

The floating clamping element in the centre supports the bar. For this purpose it must work in a floating way, that means without centring function, what can be obtained by omitting the connecting bar.

(Available on request)

# Concentric clamping elements hydraulically operated



## - Interior clamping

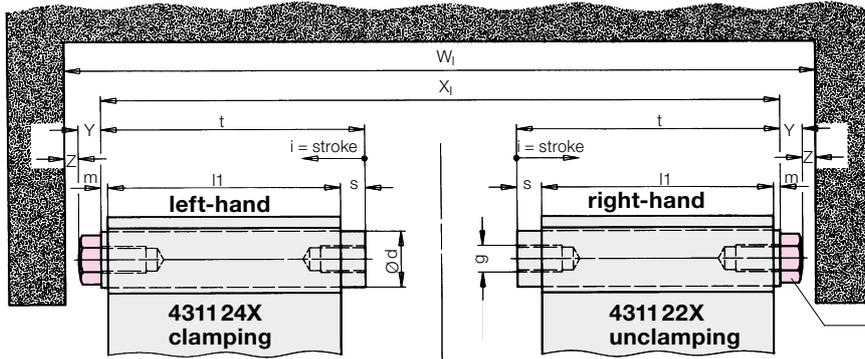


Repetitive accuracy  $\pm 0.005$  mm

Hardened contact bolts  
(y = 10 mm, dome head)  
see accessories

## - Exterior clamping

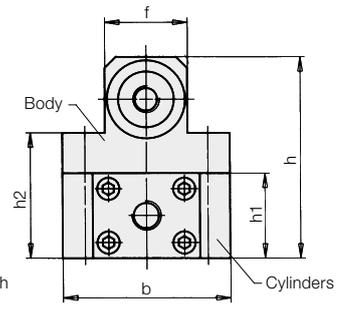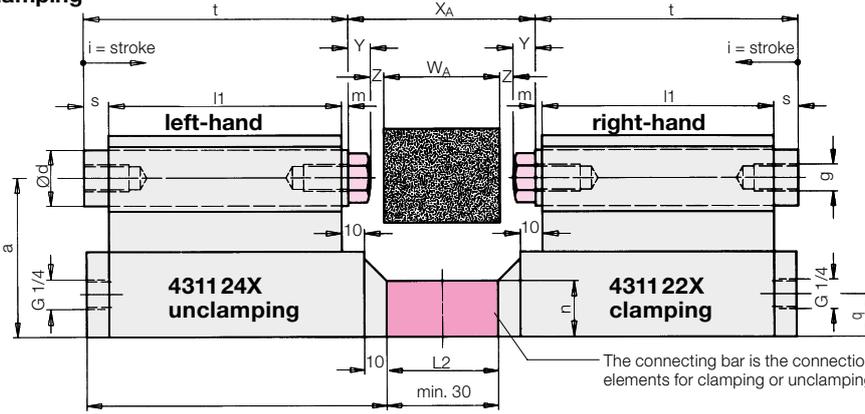

The connecting bar is the connection of both elements for clamping or unclamping

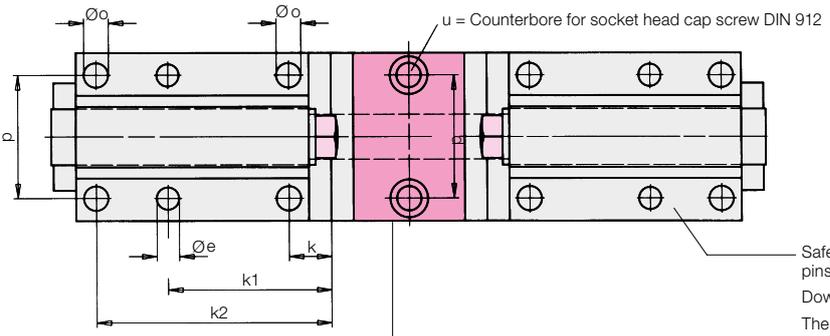

Safety device for transportations by dowel pins (hold body and cylinder together)  
Dowel pins see accessories  
The elements should only be pinned when the workpiece is exactly positioned and clamped.

### Connecting bar, complete

**Part no. 0432XXX** Please specify when ordering: 1. Size D16 / D25 / D32  
2. Length of connecting bar L2 / L3 / L4 = \_\_\_ mm

After ordering a connecting bar, you will receive an installation drawing that shows the position of the fixing screws.

### Calculation of the length of connecting bar L

Size	2 elements	3 elements + crossing for 3 elements	4 elements + crossing for 4 elements
D 16	$L2 = X2_{I/A} - X2_{min_{I/A}} + 30$	$L3 = \frac{X3_{I/A} - X3_{min_{I/A}}}{2} + 24.2$	$L4_{a/b} = \frac{X4_{I/A(a/b)} - X4_{min_{I/A}}}{2} + 20$
D 25	$L2 = X2_{I/A} - X2_{min_{I/A}} + 30$	$L3 = \frac{X3_{I/A} - X3_{min_{I/A}}}{2} + 26$	$L4_{a/b} = \frac{X4_{I/A(a/b)} - X4_{min_{I/A}}}{2} + 20$
D 32	$L2 = X2_{I/A} - X2_{min_{I/A}} + 30$	$L3 = \frac{X3_{I/A} - X3_{min_{I/A}}}{2} + 26$	$L4_{a/b} = \frac{X4_{I/A(a/b)} - X4_{min_{I/A}}}{2} + 25$

### Dimension X... for

Interior clamping  $X2_I = W_I - 2Y - 2Z$        $X3_I = W_I - 2Y - 2Z$        $X4_{I(a/b)} = W_{I(a/b)} - 2Y - 2Z$   
 Exterior clamping  $X2_A = W_A + 2Y + 2Z$        $X3_A = W_A + 2Y + 2Z$        $X4_{A(a/b)} = W_{A(a/b)} + 2Y + 2Z$

$W_I, W_{I(a/b)}$  = workpiece inside dimension       $X2_{min_I}, X3_{min_I}, X4_{min_I}$  = minimum dimension interior clamping (chart)  
 $W_A, W_{A(a/b)}$  = workpiece outside dimension       $X2_{min_A}, X3_{min_A}, X4_{min_A}$  = minimum dimension exterior clamping (chart)  
 (a/b) = only applies to crossing for 4 elements      (bolt retracted without contact bolt)  
 For rectangular section (a x b) two different lengths of connecting bars  $L_a$  and  $L_b$  are required  
 Y = height contact bolt  
 Z = ideal stroke per clamping bolt up to the workpiece (< clamping stroke)

## Dimensions • Part numbers


### Crossing for 3 elements • Crossing for 4 elements

Size		D16	D25	D32
Clamping force per pair of elements	[kN]	5	12	20
at max. operating pressure	[bar]	500	500	500
A centre height	[mm]	52	71	87
		Larger centre height on request		
b	[mm]	62	75	86
Piston/bolt $\varnothing$ d	[mm]	16	25	32
E $\varnothing$ pin hole	[mm]	8 H7	10 H7	12 H7
f	[mm]	28	37	45
g	[mm]	M 8 x 18	M 12 x 30	M 16 x 22
h	[mm]	66	90	111
h1	[mm]	27	38	47
h2	[mm]	41	56	72
i clamping stroke	[mm]	6	8	8
k	[mm]	18.5	19	22.5
k1 $\pm 0.05$	[mm]	58.5	73	81.5
k2	[mm]	83.5	105	117.5
k3	[mm]	12	15	18
k4	[mm]	22	30	35
k5	[mm]	32	40	50
l	[mm]	117	134	152
l1	[mm]	82	104	120
m	[mm]	2	3	3
n	[mm]	20	25	30
o $\varnothing$	[mm]	9	11	13
p $\pm 0.02$ (only $\varnothing$ e)	[mm]	45	55	65
p1	[mm]	40	52	60
p2	[mm]	68	86	100
q	[mm]	14	19	24
s	[mm]	8	11	11
t	[mm]	92	118	134
u (counterbore for)	[mm]	M 8	M 10	M 12
X2 min.1 / X2 min.A	[mm]	238/66	284/64	316/64
X3 min.1 / X3 min.A	[mm]	320.4/148.4	386/166	438/186
X4 min.1 / X4 min.A	[mm]	310/138	369/149	422/170
L2 min.	[mm]	30	30	30
L3 min.	[mm]	24.2	26	26
L4 min.	[mm]	20	20	25
Weight	[kg]	2.2	4.5	9
<b>Element, right-hand</b>	<b>Part no.</b>	<b>4311 221</b>	<b>4311 222</b>	<b>4311 223</b>
<b>Element, left-hand</b>	<b>Part no.</b>	<b>4311 241</b>	<b>4311 242</b>	<b>4311 243</b>
<b>Crossing for 3 elements</b>	<b>Part no.</b>	<b>0432 300</b>	<b>0432 301</b>	<b>0432 302</b>
<b>Crossing for 4 elements</b>	<b>Part no.</b>	<b>0432 400</b>	<b>0432 401</b>	<b>0432 402</b>


#### Accessories

Contact bolt ( $y = 10$ mm)	<b>Part no.</b>	<b>3614 001</b>	<b>3614 028</b>	<b>3614 003</b>
Dowel pin DIN 6325	<b>Part no.</b>	<b>3300 313</b>	<b>3300 489</b>	<b>3300 617</b>

**Crossing for 3 elements**

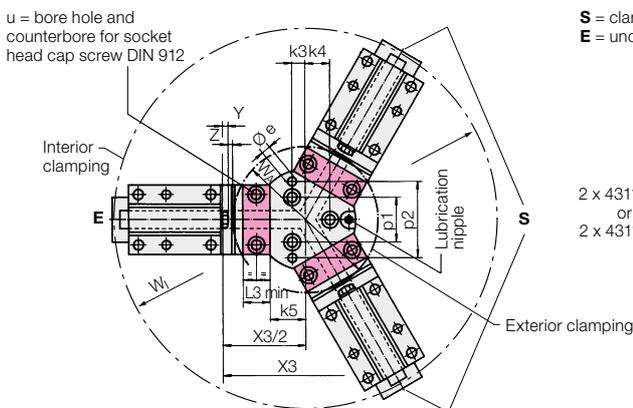

**Crossing for 4 elements**

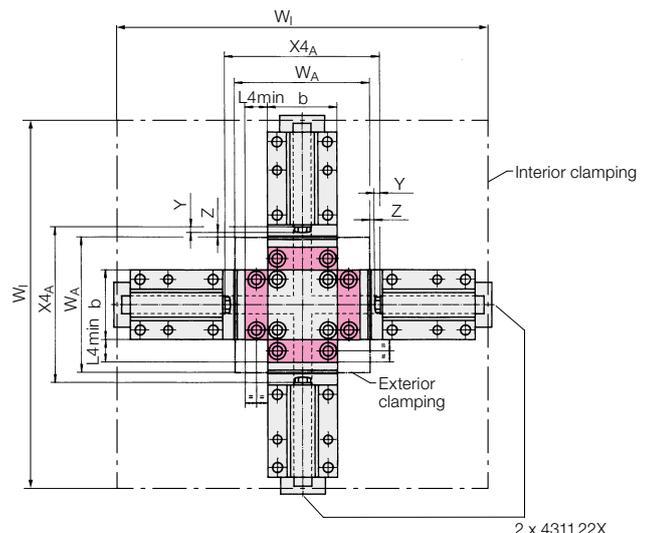

Required elements for

#### Exterior clamping

2 elements	<b>4311 22X</b>	1 element	<b>4311 22X</b>
1 element	<b>4311 24X</b>	2 elements	<b>4311 24X</b>
1 crossing for 3 elements	<b>0432 30X</b>	1 crossing for 3 elements	<b>0432 30X</b>
3 connecting bars L3	<b>0432 XXX</b>	3 connecting bars L3	<b>0432 XXX</b>

The 3 connecting bars must have the same length.

Required elements for

#### Exterior or interior clamping

2 elements	<b>4311 22X</b>
2 element	<b>4311 24X</b>
1 crossing for 4 elements	<b>0432 40X</b>
4 connecting bar L4(a/b)	<b>0432 XXX</b>

For a rectangular section, always 2 connecting bars have the same length.

# Clamping possibilities

