



## Pressure relief valve

max. operating pressure 500 bar



### Table of contents

<b>1</b>	<b>Description of the product</b>	<b>1</b>
<b>2</b>	<b>Validity of the documentation</b>	<b>1</b>
<b>3</b>	<b>Target group of this document</b>	<b>2</b>
<b>4</b>	<b>Symbols and signal words</b>	<b>2</b>
<b>5</b>	<b>For your safety</b>	<b>2</b>
<b>6</b>	<b>Application</b>	<b>2</b>
<b>7</b>	<b>Assembly</b>	<b>3</b>
<b>8</b>	<b>Start up</b>	<b>4</b>
<b>9</b>	<b>Maintenance</b>	<b>4</b>
<b>10</b>	<b>Accessory</b>	<b>5</b>
<b>11</b>	<b>Technical characteristics</b>	<b>5</b>
<b>12</b>	<b>Storage</b>	<b>5</b>
<b>13</b>	<b>Disposal</b>	<b>5</b>
<b>14</b>	<b>Declaration of manufacture</b>	<b>5</b>

### 1 Description of the product

#### Pressure relief valve

Protection against exceeding the max. operating pressure of the fixture (safety valve) or limiting of working pressures.

### 2 Validity of the documentation

This document applies to the following products:

Pressure relief valve of data sheet C 2.952.

The following types or part numbers are concerned:

#### Pressure relief valve:

- 2952 521, 525

#### Pressure relief valve with manifold-mounting connection

- 2952 010

### 3 Target group of this document

- Specialists, fitters and set-up men of machines and installations with hydraulic expert knowledge.

#### Qualification of the personnel

**Expert knowledge** means that the personnel must

- be in the position to read and completely understand technical specifications such as circuit diagrams and product-specific drawing documents,
- have expert knowledge (electric, hydraulic, pneumatic knowledge, etc.) of function and design of the corresponding components.

An **expert** is somebody who has due to its professional education and experiences sufficient knowledge and is familiar with the relevant regulations so that he

- can judge the entrusted works,
- can recognize the possible dangers,
- can take the required measures to eliminate dangers,
- knows the acknowledged standards, rules and guidelines of the technology.
- has the required knowledge for repair and mounting.

### 4 Symbols and signal words

#### WARNING

##### Person damage

Stands for a possibly dangerous situation.

If it is not avoided, death or very severe injuries will result.

#### CAUTION

##### Easy injuries / property damage

Stands for a possibly dangerous situation.

If it is not avoided, minor injuries or material damages will result.

##### Hazardous to the environment

The symbol stands for important information for the proper handling with materials that are hazardous to the environment.

Ignoring these notes can lead to heavy damages to the environment.

#### Note

This symbol stands for tips for users or especially useful information. This is no signal word for a dangerous or harmful situation.

### 5 For your safety

#### 5.1 Basic information

The operating instructions serve for information and avoidance of dangers when installing the products into the machine as well as information and references for transport, storage and maintenance.

Only in strict compliance with these operating instructions, accidents and property damages can be avoided as well as trouble-free operation of the products can be guaranteed.

Furthermore, the consideration of the operating instructions will:

- avoid injuries
- reduce down times and repair costs,
- increase the service life of the products.

#### 5.2 Safety instructions

##### WARNING

##### Poisoning due to contact with hydraulic oil!

Wear, damage of the seals, ageing and incorrect mounting of the seal kit by the operator can lead to escapes of oil.

Incorrect connection can lead to escapes of oil at the ports.

- For handling with hydraulic oil consider the material safety data sheet.
- Wear protection equipment.

##### Injury by high-pressure injection (squirting out of hydraulic oil under high pressure)!

- Improper connection can lead to escapes of oil under high pressure at the connections.
- Mounting or dismounting of the element must only be made in depressurised mode of the hydraulic system.
- Connection of the hydraulic line as per DIN 3852/ISO 1179.
- Unused connections have to be locked professionally.
- Use all mounting holes.

##### Injury by high-pressure injection (squirting out of hydraulic oil under high pressure)!

Wear, damage of the seals, ageing and incorrect mounting of the seal kit by the operator can lead to escapes of oil under high pressure.

- Before using them make a visual control.

#### CAUTION

##### Operating pressure of 500 bar does not exceed

The maximum operating pressure of 500 bar must not be exceeded.

#### NOTE

##### Qualification of personnel

All works may only be effected by qualified personnel familiar with the handling of hydraulic components.

### 6 Application

#### 6.1 Intended use

Pressure relief valves are used to protect hydraulic systems against exceeding the maximum admissible pressure or to limit working pressures.

In addition, use in compliance with the intended purpose includes:

- Use within the capacity limits specified in the technical data (see data sheet).

- Use as described in this operating manual.
- Qualified and trained personnel for the corresponding activities.
- Mounting of spare parts only with the same specifications as the original part.
- Use only within closed, low-dust rooms

## 6.2 Misapplication

### **⚠ WARNING**

#### Injuries, material damages or malfunctions!

- Do not modify the product!

The use of these products is not admitted:

- For domestic use.
- On pallets or machine tool tables in primary shaping and metal forming machine tools.
- If due to physical / chemical effects (vibrations, welding currents or others) damages of the products or seals can be caused.
- In machines, on pallets or machine tool tables that are used to change the characteristics of the material (magnetise, radiation, photochemical procedures, etc.).
- In areas for which special guidelines apply, especially installations and machines:
  - For the use on fun fairs and in leisure parks.
  - In food processing or in areas with special hygiene regulations.
  - For military purposes.
  - In mines.
  - In explosive and aggressive environments (e.g. ATEX).
  - In medical engineering.
  - In the aerospace industry.
  - For passenger transport.
- For other operating and environmental conditions e.g.:
  - Higher operating pressures than indicated on the data sheet or installation drawing.
  - With hydraulic fluids that do not correspond to the specifications.
  - Higher flow rates than indicated on the data sheet or installation drawing.
- For use as safety component with safety function.

**Special solutions are available on request!**

## 7 Assembly

### **⚠ WARNING**

#### Injury by high-pressure injection (squirting out of hydraulic oil under high pressure)!

- Improper connection can lead to escapes of oil under high pressure at the connections.
- Mounting or dismantling of the element must only be made in depressurised mode of the hydraulic system.
- Connection of the hydraulic line as per DIN 3852/ISO 1179.
- Unused connections have to be locked professionally.
- Use all mounting holes.

#### Injury by high-pressure injection (squirting out of hydraulic oil under high pressure)!

Wear, damage of the seals, ageing and incorrect mounting of the seal kit by the operator can lead to escapes of oil under high pressure.

- Before using them make a visual control.

#### Poisoning due to contact with hydraulic oil!

Wear, damage of the seals, ageing and incorrect mounting of the seal kit by the operator can lead to escapes of oil.

Incorrect connection can lead to escapes of oil at the ports.

- For handling with hydraulic oil consider the material safety data sheet.
- Wear protection equipment.

## 7.1 Design

### 7.1.1 Pressure relief valve with pipe thread

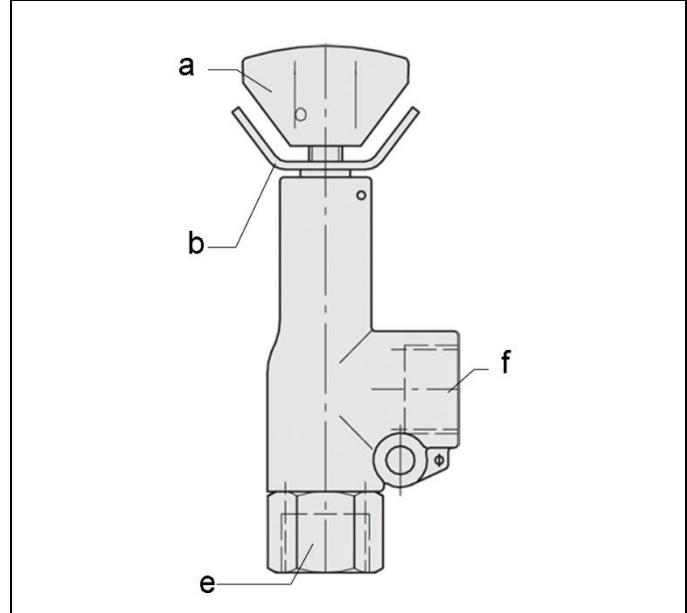


Figure 1: Pressure relief valve with pipe thread

a	Turning knob	e	Pressure port P with connecting thread G1/2 and wrench size 27
b	Lock wing	f	Return port R with connecting thread G1/2

### 7.1.2 Pressure relief valve with manifold-mounting connection

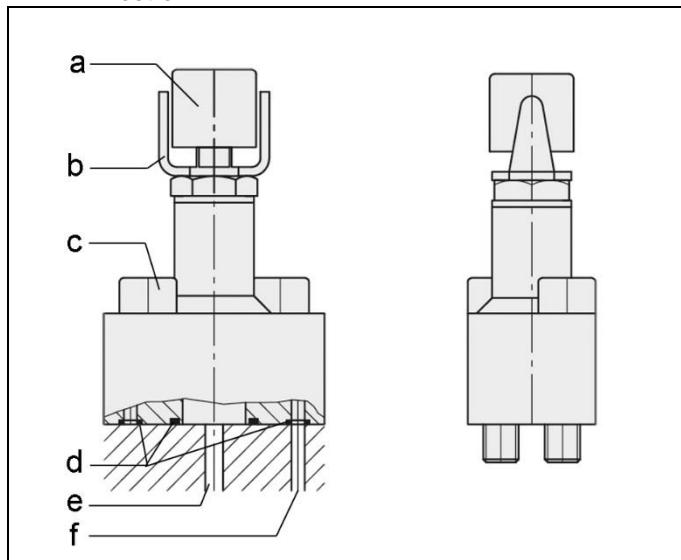


Figure 2: manifold-mounting connection

a Turning knob	d O-rings
b Lock wing	e Pressure port P Ø4
c Socket head cap screw M8	f Return line R Ø3

#### NOTE

Socket head cap screws are tightened with a tightening torque of 42 Nm.

### 7.2 Connection of the hydraulic equipment

1. Connect hydraulic lines to qualifying standards and pay attention to scrupulous cleanliness!

#### NOTE

##### More details

- See ROEMHELD data sheets A 0.100, F 9.300, F 9.310 and F 9.360.

##### Screwed Plug

- Use only fittings "screwed plug B and E" as per DIN 3852 (ISO 1179).

##### hydraulic connection

- Do not use sealing tape, copper rings or coned fittings.

##### Pressure fluids

- Use hydraulic oil as per ROEMHELD data sheet A 0.100.

### 7.3 Pressure relief valve

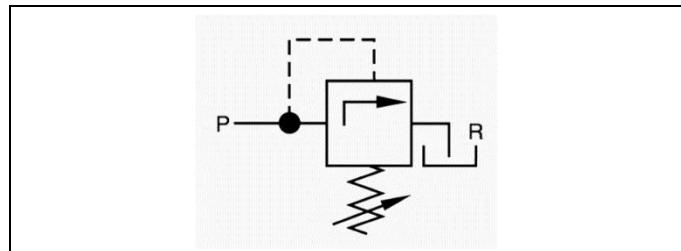


Figure 3: Presentation in the hydraulic circuit diagram

### 7.4 Adjust the pressure relief valve

- Loosen the lock wing (b).
- Increase the relief pressure by screwing in (clockwise) the turning knob (a).
- Reduce the relief pressure by screwing out (counterclockwise) the turning knob (a).
- Tighten the lock wing (b).

#### NOTE

- Check correct operation by actuating several times.

#### CAUTION

**Damage of components due to incorrectly adjusted components**

Carry out some clamping and unclamping operations to ensure proper operation.

## 8 Start up

#### WARNING

##### Injuries due to misuse, incorrect operation or abuse!

Injuries can occur if the product is not used within the intended use and the technical performance data.

- Before start up, read the operating instructions!

##### Troubles of functioning

Protect the valve against penetration of swarf, otherwise the clamping force of a connected clamping cylinder is possibly no longer guaranteed.

##### Swarf in the hydraulic oil

Swarf in the hydraulic oil can damage the valve seat so that an immediate pressure drop can occur in the clamping system.

#### CAUTION

##### Operating pressure should not exceed

The max. operating pressure must not be exceeded (see technical characteristics).

## 9 Maintenance

#### WARNING

##### Burning due to hot surface!

- In operating conditions, surface temperatures of more than 70 °C can appear at the product.
- All maintenance and repair works must only be effected in cooled mode or with safety gloves.

## 9.1 Cleaning

The product must be cleaned from dirt, swarf and liquids at regular intervals.

## 9.2 Regular checks

### **WARNING**

#### **Injury by high-pressure injection (squirting out of hydraulic oil under high pressure)!**

Defect or leaking fittings and connecting parts have to be exchanged.

## General Information

1. Check components if there are damages.
2. Check tightness and leakage of hydraulic connections and connecting parts (visual control).
3. Check the observance of the maintenance intervals.

## 10 Accessory

### **NOTE**

#### Accessories

Accessories, available on request.

## 11 Technical characteristics

Part no.	2952 521
Max. operating pressure, port P [bar]	500
Max. operating pressure, port R [bar]	20
Adjustment range [bar]	0...500
Flow rates max. [l/min]	40
Hydraulic oil	HLP as per DIN 51524
Oil temperature [ °C]	-25...+80
Part no.	2952 525
Max. operating pressure, port P and R [bar]	500
Part no.	2952 010
Max. operating pressure, port P [bar]	500
Max. operating pressure, port R [bar]	400
Adjustment range [bar]	20...500
Flow rates max. [l/min]	5
Oil temperature [ °C]	-25...+80

### **NOTE**

#### Further information

- For further technical data see ROEMHELD data sheet C2952

## 12 Storage

### **CAUTION**

#### Storage of components!

- The product may not be exposed to direct solar radiation, because the UV light can destroy the seals.
- A storage differing from the storage conditions is inadmissible.
- In case of improper storage, the seals can embrittle and resinification of the anti-corrosive oil or corrosion at the element can occur.

The elements are tested by default with mineral oil. The exterior of the elements is treated with a corrosion inhibitor.

The oil film remaining after the test provides for a six-month interior corrosion protection, if stored in dry and uniformly tempered rooms.

For longer storage times, the element has to be filled with a non-resinifying corrosion inhibitor and the outside surfaces must be treated.

## 13 Disposal

### Hazardous to the environment

Due to possible environmental pollution, the individual components must be disposed only by an authorised expert company.

The individual materials have to be disposed as per the existing regulations and directives as well as the environmental conditions.

Special attention has to be drawn to the disposal of components with residual portions of hydraulic fluids. The instructions for the disposal at the material safety data sheet have to be considered.

For the disposal of electrical and electronic components (e.g. stroke measuring systems, proximity switches, etc.) country-specific legal regulations and specifications have to be kept.

## 14 Declaration of manufacture

#### Manufacturer

Römhild GmbH Friedrichshütte  
 Römhildstraße 1-5  
 35321 Laubach, Germany  
 Tel.: +49 (0) 64 05 / 89-0  
 Fax: +49 (0) 64 05 / 89-211  
 E-mail: info@roemheld.de  
 www.roemheld.com

#### Declaration of manufacture of the products

They are designed and manufactured in line with the relevant versions of the directives **2006/42/EC** (EC MSRL) and in compliance with the valid technical rules and standards.

In accordance with EC-MSRL and EN 982, these products are components that are not yet ready for use and are exclusively designed for the installation in a machine, a fixture or a plant.

According to the pressure equipment directives the products are not to be classified as pressure reservoirs but as hydraulic placing devices, since pressure is not the essential factor for the design, but the strength, the inherent stability and solidity with regard to static or dynamic operating stress.

The products may only be put into operation after it was assessed that the incomplete machine/machine, in which the

product shall be installed, corresponds to the machinery directives (2006/42/EC).

The manufacturer commits to transmit the special documents of the products to state authorities on request.

The technical documentation as per appendix VII part B was prepared for the products.

Responsible person for the documentation:  
Dipl.-Ing. (FH) Jürgen Niesner, Tel.: +49(0)6405 89-0.

**Römh**eld GmbH**  
**Friedrichshütte****

Laubach, 28.06.2019